



## **BEA Architectural Specification Sheet Automatic and Industrial Door Solutions: Push Plate – 10PBSx (Hardwired)**

### **Product Specifications**

Square Push Plate for sliding, swinging, folding and revolving doors. Wired push plate shall utilize a single pole dry contact switch capable of providing a normally open or normally closed contact for door activation.

1. Push plate provided with no exposed fasteners on the faceplate area.
2. Faceplate utilizes an abrasive etch lettering and/or logo.
3. Push plates made of plastic, or having surface applied painted or decaled lettering shall not be acceptable.
4. Stainless steel square style push plate (PBS) for bollard and wall mount applications.
5. Beveled edges provide a tamper and vandal proof solution
6. All-activate plate activates with any "push" location.
7. Weather boot provided between plate and plate back.

**Note To Specifier: Select one of the following model paragraphs and delete those not required.**

8. Model 10PBS marked PUSH TO OPEN, 4.75 inches (12.06 mm) by 4.75 inches (12.06 cm) by 1.27 inch (3.22 cm).
9. Model 10PBSLL Handicapped logo 4.75 inches (12.06 cm) by 4.75 inches (12.06 cm) by 1.27 inch (3.22 cm).
10. Model 10PBS1 Handicapped logo and marked PUSH TO OPEN, 4.75 inches (12.06 cm) by 4.75 inches (12.06 cm) by 1.27 inch (3.22 cm).
11. Model 10PBS10 no marking, 4.75 inches (12 mm) by 4.75 inches (12.06 cm) by 1.27 inch (3.22 cm).
12. Model 10PBS1B Handicapped logo and marked PUSH TO OPEN, 7.75 inches by 4.75 inches (19.68 cm x 12.06 cm), blue powder coat finish with white infill.
13. Model 10PBS1SB Handicapped logo and marked PUSH TO OPEN, 7.75 inches by 4.75 inches (19.68 cm x 12.06 cm), Satin brass finish with blue infill.
14. Model 10PBS1SBB Handicapped logo and marked PUSH TO OPEN, 7.75 inches by 4.75 inches (19.68 cm x 12.06 cm), Bright brass finish with blue infill.

**Note To Specifier: Select one of the following mounting paragraphs and delete those not required.**

15. Model 10BOX6RNDISM – ABS surface mount box
16. Model 10BOX6RNDIFM – ABS flush mount.

BEA Inc.  
RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213


Phone: 1.800.523.2462  
Fax: 1.888.523.2462



Member  
American Association of  
Automatic Door Manufacturers

A HALMA COMPANY

### Product image and Application Photo

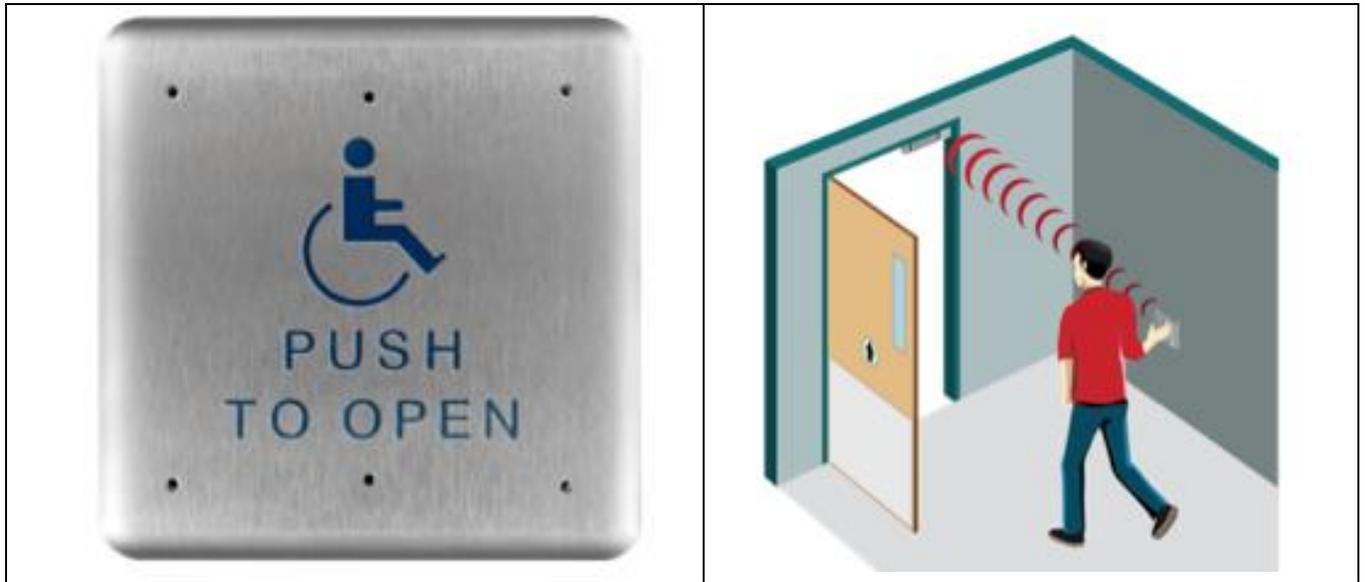

### Technical Specs:

Faceplate Material	16 gauge, 304 2B Stainless Steel
Backplate Material	1/8 inch (.31 cm) thick, Aluminum
Mounting Screws	Stainless Steel, 6-32 x 1 in & 8-32 x 1 in Allen Head Size: 5/64
Cherry Switch	Single-pole, 15 A, COM/NO/NC

### Dimensions:



BEA Inc.  
 RIDC Park West  
 100 Enterprise Drive  
 Pittsburgh, PA 15275-1213

Phone: 1.800.523.2462  
 Fax: 1.888.523.2462



Member  
 American Association of  
**AAADM** Automatic Door Manufacturers

A HALMA COMPANY

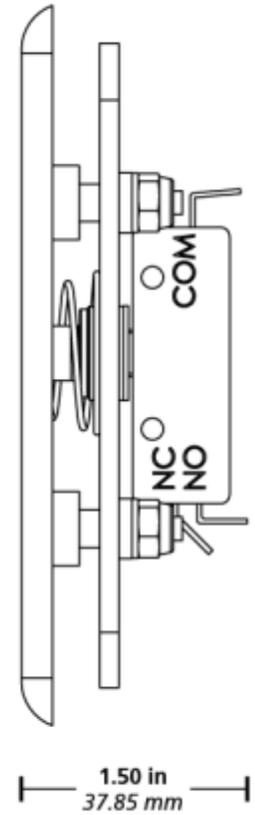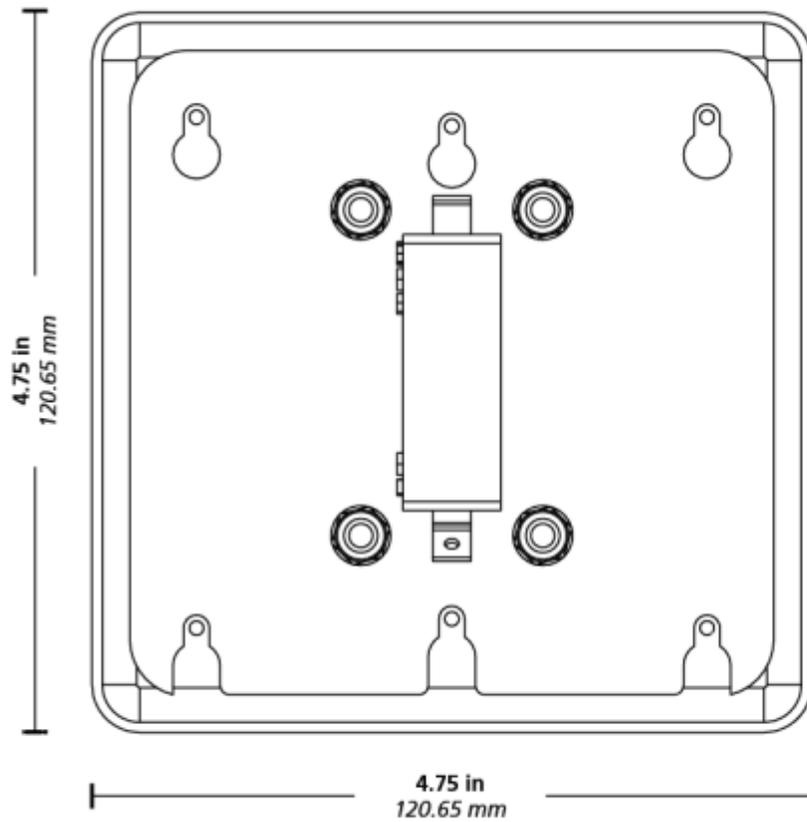

**BEA Inc.**  
RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213

Phone: 1.800.523.2462  
Fax: 1.888.523.2462

79.0260.01 20151203



**AAADM** Member  
American Association of  
Automatic Door Manufacturers

A HALMA COMPANY