


# EMERGENCY ADD-ON KIT

## FOR SINGLE OCCUPANCY RESTROOMS



### PRIMARY APPLICATIONS

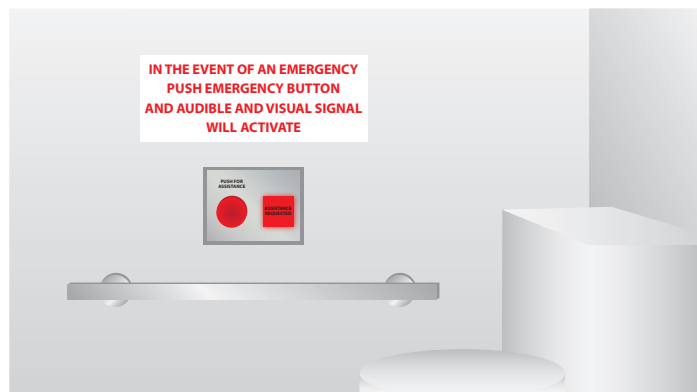

### DESCRIPTION

BEA's EMERGENCY ADD-ON KIT is designed to be used in single occupancy restrooms where someone may require emergency assistance.

It can be used in conjunction with BEA's RESTROOM KIT or as a standalone solution. It is designed to meet building codes requiring an emergency request system.

### FEATURES & BENEFITS


- "ASSISTANCE REQUIRED" signal (LED + adjustable sounder) for outside signaling
- "PUSH FOR EMERGENCY ASSISTANCE" button + indicator (LED + selectable sounder) combined unit for ease of installation
- Double-sided French / English emergency signage
- Ontario Regulation 368/13 compliant



BEA, Inc.  
RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462  
Technical Support: 800.407.4545  
[www.BEAinc.com](http://www.BEAinc.com)

## APPLICATIONS

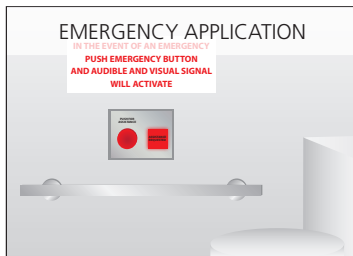

## TECHNICAL SPECIFICATIONS

### 10ARS

Lamp Voltage Rating	28 VAC / VDC
Sounder Voltage Rating	16 – 25 VAC / VDC
Sounder Current Rating	15 mA
Lamps	Miniature bayonet type (#313)
Mounting	Fits standard single-gang
Sounder & Lamp Terminal	2 pigtail wires (each)
Material	Stainless steel & Polycarbonate
Dimensions	
Single Gang Faceplate	2.75" (W) × 4.5" (H)
White Lens (B-31695)	2.25" (W) × 4.0" (H) × 3.125" (D)

### 10EBUTTONCOMBO

Voltage	12 – 24 VAC / VDC ±10%
Indication	Audible buzzer (selectable on/off) and visual LED
Text Inserts	10
Button	E-stop button Push On / Pull Off
Material	Stainless steel & Polycarbonate
Accessory	Rubber weather gasket included
Certifications	FCC

### 70.5675

Material	Polystyrene
Dimensions	12.0" (W) × 5.5" (H)
Language	Double-sided French / English

## RELATED PRODUCTS




**10EMERGENCYKIT**  
EMERGENCY  
ADD-ON KIT



**10BR3X**  
3-RELAY  
LOGIC MODULE




**10RESTROOMKIT**  
RESTROOM  
KIT



**10ARS**  
"ASSISTANCE  
REQUIRED" SIGNAL



**10EBUTTONCOMBO**  
"PUSH FOR EMERGENCY  
ASSISTANCE"  
BUTTON + INDICATOR



**70.5675**  
EMERGENCY  
SIGNAGE



**1012VAC**  
12 VAC (20 VA)  
TRANSFORMER



**1024VAC**  
24 VAC (40 VA)  
TRANSFORMER

www.BEAinc.com

© 2018 BEA, Inc. All rights reserved.

## EMERGENCY ADD-ON KIT FOR SINGLE OCCUPANCY RESTROOMS

BEA, Inc.  
RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462  
Technical Support: 800.407.4545

