



BEA ARCHITECTURAL SPECIFICATION SHEET

Automatic and Industrial Door Solutions: LZR-MICROSCAN T

Product Specifications

UL listed power door sensor system capable of providing presence detection that exceeds the requirements of ANSI 156.10 (8.2.2.3) on swing doors. The door mounted presence sensor system shall detect stationary humans or equivalent within the sensing pattern. The sensor shall utilize distance-measuring time of flight technology and have a self-adapting pattern that is background independent. The system shall require no learn time due to changes in background reflectivity.

1. UL 10B/C Listed, and fire rated for up to three hours.
2. Presence sensor system shall be door-mounted only, and device should not exceed 5.26 in. x 2.43 in. (13.36 cm x 6.17 cm) in size.
3. Utilizes time of flight technology to provide complete background independence.
4. Each sensor pattern shall be capable of being adjusted to no less than the width of the door panel to accommodate 24 in. to 48 in. (61 cm x 121.92 cm) door leaves.
5. System shall allow for independent stall feature in dual egress applications.
6. Sensor configuration and diagnostics to be provided at a centralized hub inside the door header. Only one hub shall be required per opening
7. Sensor shall utilize a transfer loop assembly connecting the hub to the sensors.
8. System shall utilize a hub to transfer/communicate with the automatic door control.

Note to specifier:

1. 10LZRMICROSCAN1UT for single doors (does not include activation device)
2. 10LZRMICROSCAN2UT for simultaneous pairs or dual egress doors (does not include activation device)

BEA Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213


Phone: 1.800.523.2462
Fax: 1.888.523.2462



AAADM Member
American Association of
Automatic Door Manufacturers

A HALMA COMPANY

Product Image and Application Photo

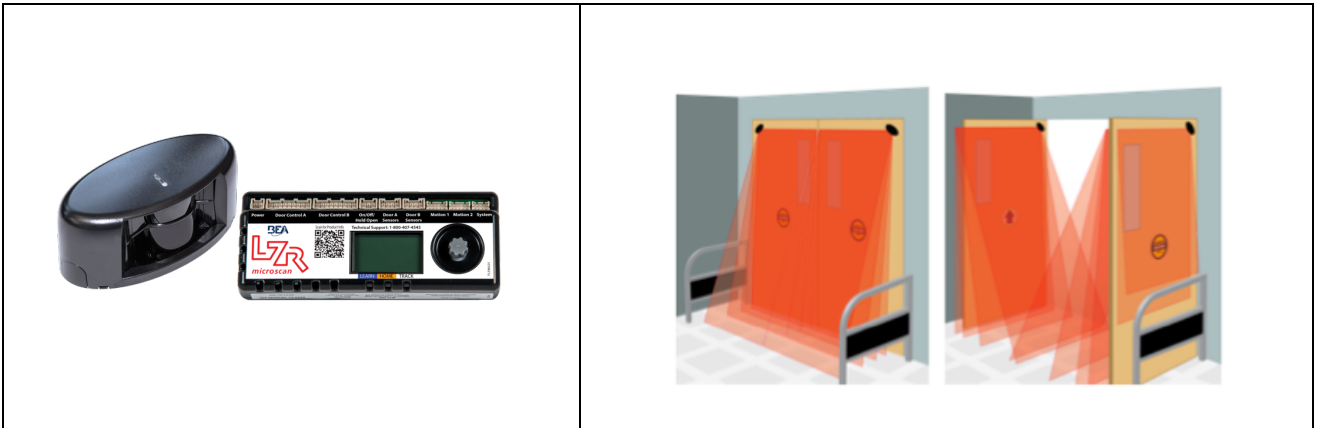

Technical Specs:

Technology:	Laser Scanner, Time-of-Flight Measurement
Detection mode:	Presence
Maximum door width:	48 in (121.92 cm)
Mounting Height:	79 in. to 98 in. (200.66 cm x 248.92 cm) (measured from finished floor to sensor LED)
Remission Factor:	> 2%
Angular Resolution:	2.56°
Test body (H×W×D):	28 in. × 12 in. × 8 in. (71.1 cm x 30.48 cm 20.32 cm) (according to UL325)

Input:	2 Optocouplers (Galvanic Isolated, Polarity Free)
Test Input:	8 – 15 VDC
Temperature Range:	-13°F to 121°F (-25°C to 55°C)
Degree of Protection:	Hub: IP20/NEMA 1 Sensor: IP53/NEMA 3
Humidity:	0 – 95% Non-condensing
Vibrations:	< 2 G
Material:	PC/ASA

BEA Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Phone: 1.800.523.2462
Fax: 1.888.523.2462



Member
American Association of
Automatic Door Manufacturers

A HALMA COMPANY



Emission Characteristics: IR laser:	Wavelength 905 nm; Maximum Output Pulse Power 35 W (CLASS 1)
Supply Voltage:	12 – 30 VDC \pm 10% (15 W Class II)
Power Consumption:	15 W maximum
Response Time:	Typ. 40 ms; Max. 80 ms
Output:	4 Electro-mechanic Relays (Polarity Free)

Norm Conformity:	EN 60825-1-Eye-safety class 1 IR laser (905 nm), UL60730, UL 10B/C Fire Rated 3hrs (file #R39071)
Mounting Angle (rotational):	35° fixed
Tilt Angle:	0° to 5° (for angles less than 5° contact Technical Support)
Pollution on Front Screens:	Maximum 30%; Homogenous

BEA Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Phone: 1.800.523.2462
Fax: 1.888.523.2462




AAADM *Member*
American Association of
Automatic Door Manufacturers


A HALMA COMPANY



Sensor Dimensions:

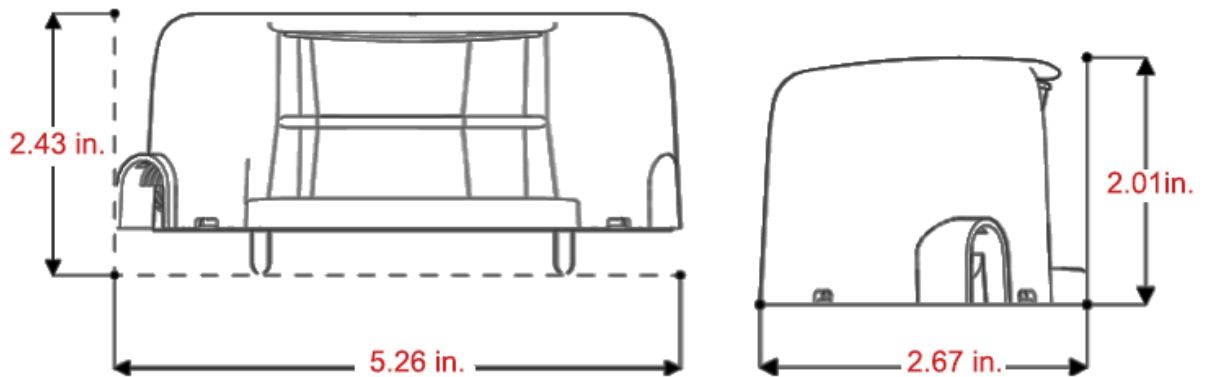

Hub Dimensions:

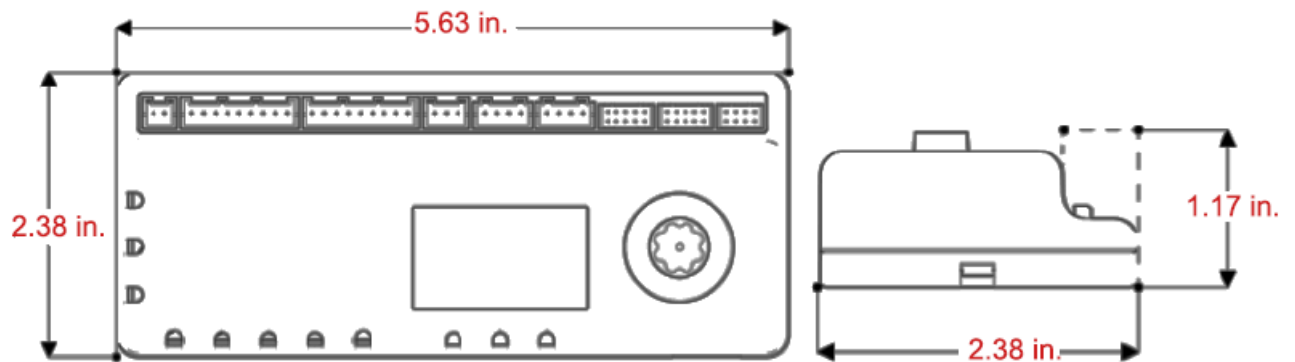

BEA Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Phone: 1.800.523.2462
Fax: 1.888.523.2462



AAADM Member
American Association of
Automatic Door Manufacturers

A HALMA COMPANY