




LPR36

FULL-LENGTH, 36 INCH HIGH-LOW ACTUATOR

LEARN MORE



Click or scan

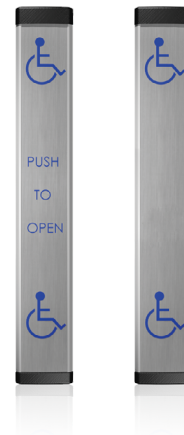

DESCRIPTION

BEA's **LPR36** is a 36 inch actuator that exceeds all local ADA building codes requiring high and low actuators, eliminating the need to install two separate devices.

This stainless steel plate utilizes four highly-sensitive membrane switches that require very little force and ensure actuation across the entire surface. This functionality enhances accessibility for those with limited mobility or disabilities.

Available in wireless and hard wire versions, the **LPR36** can be conveniently mounted in a variety of locations.



Enhances Accessibility


Offers a mean of activation of automatic doors for those with limited mobility or disabilities

Low Profile, Aesthetically Pleasing Design

Low profile (1 inch deep) design helps prevent accidental damage in high traffic areas

Standard Compliant, High Accessibility Plate

Exceeds California Building Code 2013, Page 559, 11B-404.2.9, Exception 2c

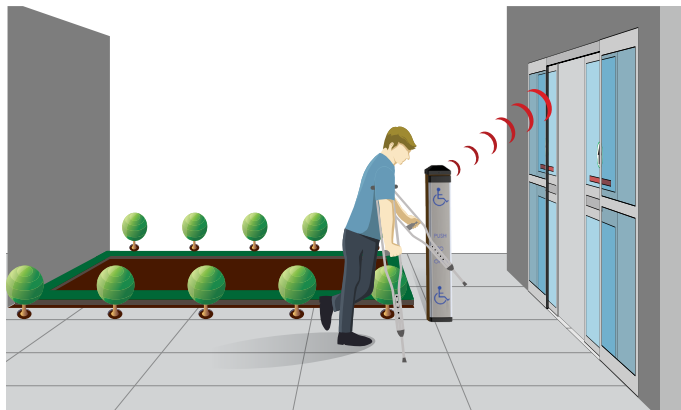

Versatile Mounting

Easily installs on either walls or bollards for maximum mounting flexibility


Easily Converts To Wireless

Available with convenient, built-in wireless transmitter (300, 433 or 900 MHz frequencies) for wireless activation applications

Full Length Activation

Activation area of 36 x 6 inches (216 square inches)

APPLICATIONS



Sliding Doors



Swinging Doors



Revolving Doors

TECHNICAL SPECIFICATIONS

Contact Configurations	SPST N.O.
Switching Voltage	0.1 – 50 VDC
Switching Capacity	1 Watt
Switching Current	0.005 – 100 mA DC
Operation Temperature	-32 – 212 °F (-35 – 100 °C)
Material	
Base	6063 Aluminum
Face Plate	304 Stainless Steel
Switch Actuator	Nylon 66
End Cap	UL94 ABS
Hardware	Stainless Steel
Compliance	California Building Code 2013, Page 559, 11B-404.2.9, Exception 2c

*NOT RECOMMENDED FOR USE IN AN ENVIRONMENT WHERE IT WILL BE DIRECTLY EXPOSED TO WATER. FOR EXAMPLE, OUTDOOR, NOT PROTECTED FROM DIRECT RAIN.

**Wireless conversion kit for transmitter replacement or conversion from hardwired to wireless

PRODUCT SERIES

 10LPR36-300 300 MHz Text & logos	 10LPR36L-300 300 MHz Logos only	 10LPR36-433 433 MHz Text & logos
 10LPR36L-433 433 MHz Logos only	 10LPR36-900 900 MHz Text & logos	 10LPR36L-900 900 MHz Logos only
 10LPR36-HW Hardwired Text & logos	 10LPR36L-HW Hardwired Logos only	 10BOLLARDSLVWOH Silver bollard non-drilled
 10BOLLARDBLKWOH Black bollard non-bollard	 10BOLLARDBRZWOH Bronze bollard non-drilled	 10R300 300 MHz analog receiver
 10RD433 433 MHz receiver	 10RD433EH Extended hold time receiver	 10RD900 900 MHz receiver
10WCK433**	Converts LPR36 from hardwired to wireless for 433 frequency	
10WCK900**	Converts LPR36 from hardwired to wireless for 900 frequency	

LPR36 FULL-LENGTH, 36 INCH HIGH-LOW ACTUATOR

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM



BEA AMERICAS / RIDC Park West / 100 Enterprise Drive / Pittsburgh, PA
 T 1-800-523-2462 / F 1-888-523-2462 / E info-us@BEAsensors.com

A Halma company