



LZR-FLATSCAN A

COMPACT, LASER SCANNER FOR FACTORY & LOGISTICS APPLICATIONS

DESCRIPTION

BEA's **LZR®-FLATSCAN A** is a compact, LASER-based Time-of-Flight sensor. This high-precision technology ensures accurate object detection.

When installed and adjusted correctly, the sensor is designed for the detection of people or vehicles, in both indoor and outdoor environments. Its detection accuracy makes this sensor ideal for factory automation and logistics applications requiring a small but robust sensing solution.

The **LZR®-FLATSCAN A** is housed in an IP66 rated enclosure and can be utilized in outdoor, industrial, and other harsh environments.

Three visible LED spots provide accurate reference points that aid in adjusting the tilt angle and/or detection field orientation. Parameter adjustments can be made with a BEA **UNIVERSAL REMOTE CONTROL**.

APPLICATIONS




Driverless Fork Truck



Industrial Roll-up Door

DIMENSIONS

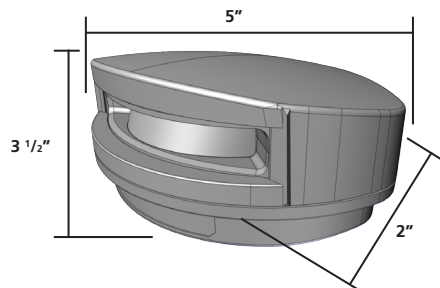

TECHNICAL SPECIFICATIONS

TECHNOLOGY / PERFORMANCE

Technology	LASER sensor, time-of-flight measurement
Detection mode	presence
Max. detection range	max. 18' x 18' (13 1/8" @ 5% reflectivity)
Opening angle	90°
Tilt angles	±3° (with bracket)
Emission characteristics	wavelength 905nm; max. output pulse power 25W (CLASS 1) wavelength 635nm; max. output CW power 0.95mW (CLASS 2) visible spot

Angular resolution 0.23° (400 spots within 90°)

LEDs 1 tri-colored LED: detection / output status

ELECTRICAL

Supply voltage*	12 – 24 VDC ±15%
Power consumption	≤ 2.3W, peak current: 1A
Response time	max. 50ms (+ output activation delay)
Output	1 opto (galvanic isolation - polarity free)
max. switching voltage	42 VAC/VDC
max. switching current	100mA
	1 relay (free of potential contact)
max. contact voltage	42 VAC/VDC
max. contact current	1A (resistive)
max. switching power	30W DC / 60 VAC

PHYSICAL

Dimensions	5" (L) x 3 1/2" (H) x 2" (D) (without bracket)
Color	black
Protection degree	IP66 (IEC 60529)
Temperature range (when powered)	-22 – 140 °F (-30 – 60 °C)
Humidity	0 – 95% non-condensing
Vibrations	< 2G

COMPLIANCE

Compliance	IEC 60825-1, IEC 60950-1, IEC 61000-6-2, IEC 61000-6-3, IEC 60529:2001
-------------------	--

* If only VAC power is available, a 12V transformer paired with a rectifier must be used. Do not use a 24V transformer and rectifier as this will cause damage to the product.

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM



BEA AMERICAS / RIDC Park West / 100 Enterprise Drive / Pittsburgh, PA
T 1-800-523-2462 / F 1-888-523-2462 / E info-us@BEAsensors.com

A Halma company