

PNEUMATIC PUSH BUTTONS

ADJUSTABLE TIME DELAY SECURITY BUTTON



SHOWN ABOVE:
SINGLE STYLE WITH RED AND GREEN 2 INCH BUTTON
JAMB STYLE WITH BLUE 1 5/8 INCH BUTTON

PRIMARY APPLICATIONS



DESCRIPTION

BEA's Pneumatic Push Buttons are ruggedized, including stainless steel faceplates and colored, anodized aluminum buttons, appropriate for most indoor applications.

The device is uniquely designed to minimize the number of moving parts, in turn reducing the wear and tear of the button and extending the life of the device.

Upon activation, the user-defined time delay initiates without additional mechanical action or the need of external power.

FEATURES & BENEFITS

- Adjustable time delay of 2 – 60 seconds
- Listed UL 508 / CSA C22.2 No 14-10 with MET LABS, File #E113051
- Available in single and jamb size plates
- Buttons available in 1 5/8 inch (standard) or 2 inch (large) sizes
- Available in a variety of combinations of color, text and logo upon request
- Tested to perform greater than 1 million operations



BEA, Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462
Technical Support: 800.407.4545
www.BEAinc.com


APPLICATIONS



TECHNICAL SPECIFICATIONS

| | |
|---------------------------------|--|
| Technology | Pneumatic |
| Faceplate Dimensions | |
| Single | 2.75 in (W) × 4.5 in (H) |
| Jamb | 1.75 in (W) × 4.5 in (H) |
| Visual Style | Red Button with Push to Exit Text Blue Button with Handicap Logo Green Button with Push to Exit Text |
| Materials | Stainless steel faceplate with colored, anodized aluminum button |
| Switch Rating | 5 A @ 125 VAC |
| Time Range | 2 s – 60 s, adjustable |
| Relative Timing Accuracy | ±5% @ 72 °F |
| Contactors | NO or NC |
| Operating Temperature | Rated for indoor use only –15 °F – 120 °F |
| Product Life Test | 1 million operations |

DIMENSIONAL DRAWINGS

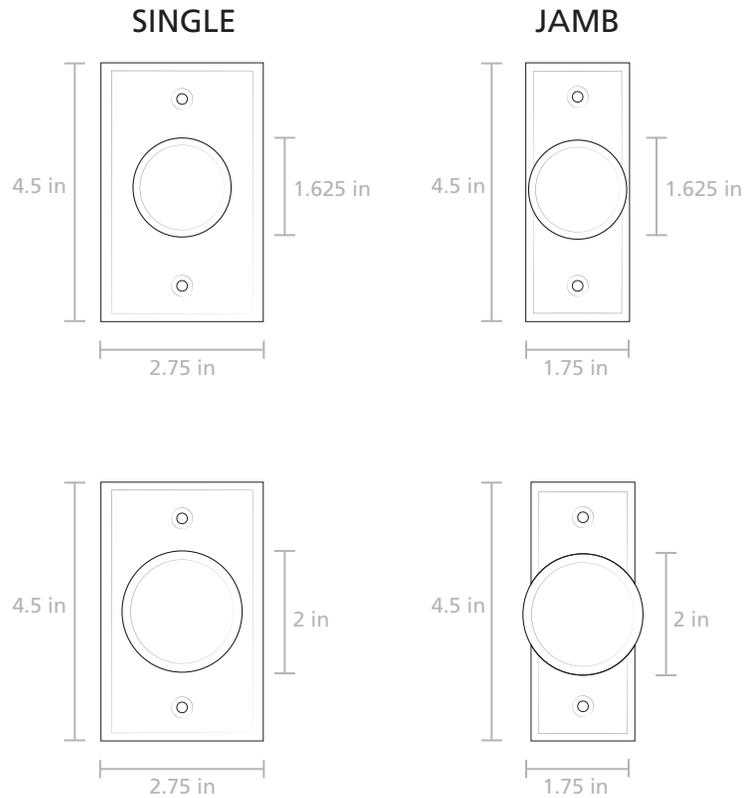

RELATED PRODUCTS

| | | |
|--|--|---|
| | | |
| 10ACPBD A1 2 INCH JAMB, TEXT ONLY | 10ACPBD A2 2 INCH SINGLE, TEXT ONLY | 10ACPBD A3 1 1/2 INCH JAMB, TEXT ONLY |
| | | |
| 10ACPBD A4 1 1/2 INCH SINGLE, TEXT ONLY | 10ACPBD A5 2 INCH JAMB, LOGO ONLY | 10ACPBD A6 2 INCH SINGLE, LOGO ONLY |
| | | |
| 10ACPBD A7 1 1/2 INCH JAMB, LOGO ONLY | 10ACPBD A8 1 1/2 INCH SINGLE, LOGO ONLY | 10ACPBD A9 2 INCH JAMB, TEXT ONLY |
| | | |
| 10ACPBD A10 2 INCH SINGLE, TEXT ONLY | 10ACPBD A11 1 1/2 INCH JAMB, TEXT ONLY | 10ACPBD A12 1 1/2 INCH SINGLE, TEXT ONLY |
| | | |
| 10BOX24SGSM STANDARD SURFACE MOUNT | 10BOXJAMBST JAMB SURFACE MOUNT | |

www.BEAinc.com

© 2017 BEA, Inc. All rights reserved.

PNEUMATIC PUSH BUTTONS

ADJUSTABLE TIME DELAY SECURITY BUTTON

79.0214.16

20170501

BEA, Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462
Technical Support: 800.407.4545

