

R2E-100 DOOR HANDLE SENSOR

ALTRONIX
12-24VDC
POWER SUPPLY
AL175UL
BEA PT#
10PS12-24

INPUT 115VAC/60Hz
.6 AMP

BLACK

WHITE

GREEN


AUX. (-)
AUX. (+)
24VDC @
1.75 AMP

BLACK -POWER
RED-POWER
GREEN/BLACK N.O.1
YELLOW/BLACK-N.C.1
WHITE/BLACK-COM.
GREEN-N.O.2
YELLOW-N.C.2
WHITE-COM.2
BLUE-CARD(+)
BLUE/WHITE-CARD (-)
ORANGE-REX (+)
ORANGE/WHITE-REX (-)
BROWN-DPS (+)
BROWN/WHITE-DPS (-)


UL
MAGLOCK

POS.
NEG.

CARD
READER
OR KEY PAD
(OPTIONAL)
NORMALLY CLOSED
ie CLOSED WHEN
NO CARD
PRESENTED
DRY CONTACT



FLY,REX SENSOR
(optional)
NORMALLY OPEN
ie OPEN WHEN NO
ACTIVATION
DRY CONTACT

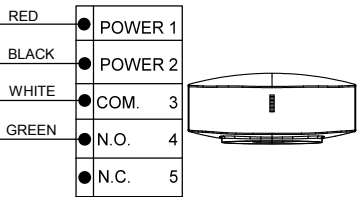

BEA
OPEN UP NEW HORIZONS
HALMA GROUP
COMPANY

100 ENTERPRISE DRIVE
PITTSBURGH, PA 15275
PHONE: (412) 249-4100
FAX: (412) 249-4101
EMAIL: www.beasensors.com

TITLE:
R2E-100 DOOR HANDLE SENSOR
TIMER MODE (DIP2 IS OFF)

SIZE: A	DRAWN BY: WJR	REV BY: WJR	PART NO: 80.0315.01
	SCALE: NONE	DATE: 13 Jan. 2012	SHEET 1 OF 1

NOTES:

IF AFTER TROUBLESHOOTING A PROBLEM, A SATISFACTORY SOLUTION CANNOT BE ACHIEVED, PLEASE CALL B.E.A., INC. FOR FURTHER ASSISTANCE DURING EASTERN STANDARD TIME AT 1-800-523-2462 FROM 8AM - 5PM. FOR AFTER-HOURS, CALL EAST COAST: 1-866-836-1863 OR 1-800-407-4545 / MID-WEST: 1-888-308-8843 / WEST COAST: 1-888-419-2564. DO NOT LEAVE ANY PROBLEM UNRESOLVED. IF YOU MUST WAIT FOR THE FOLLOWING WORKDAY TO CALL B.E.A., LEAVE THE DOOR INOPERABLE UNTIL SATISFACTORY REPAIRS CAN BE MADE. NEVER SACRIFICE THE SAFE OPERATION OF THE AUTOMATIC DOOR OR GATE FOR AN INCOMPLETE SOLUTION.WEB: WWW.BEASENSORS.COM