




APPLICATION NOTE

**IXIO-Optex
Conversion Harness
20.5322**

BEA Products to which this Application Note applies: 10IXIODT1

This harness converts existing Optex wiring for IXIO use. It is flat so the harness can run from the left side of the IXIO, where the wire nuts will be located, to the right side of the IXIO, where the plug-in connector is located.

CAUTION: This harness does not support monitoring.

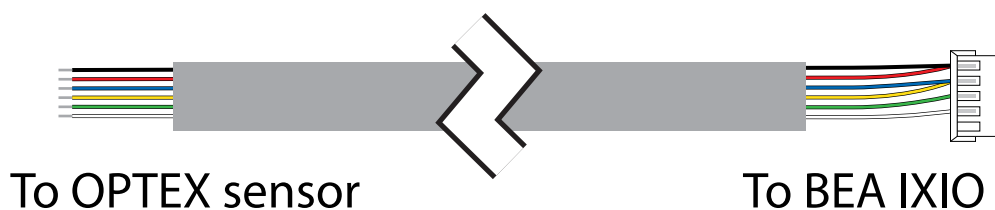

SIGNAL	BEA HARNESS COLOR	WIRE NUT TO	
		OPTEX i-one	OPTEX x-zone
Power	red	grey	grey
Power	black	grey	grey
Activation COM	white	white	white
Activation NO	green	yellow	yellow
Safety COM	yellow	white	white stripe
Safety NO	blue	yellow	yellow stripe