


RED
BLACK
YELLOW-N.C.
GREEN-N.O.
WHITE-COM.



PT# 10R2E100
SEE NOTE 2


RED -POWER
BLACK-POWER
WHITE/BLACK COM.1
GREEN/BLACK-N.O.1
YELLOW/BLACK-N.C. 1
WHITE-COM. 2
GREEN-N.O. 2
YELLOW N.C. 2
BLUE-CARD READER INPUT- DRY N.C. DIP SW 6 ON
BLUE/WHITE-CARD READER INPUT- DRY N.C. DIP SW 6 ON
ORANGE-REX INPUT- DRY N.O.
ORANGE/WHITE-REX INPUT- DRY N.O.
BROWN-DPS INPUT- DRY N.O. DIP SW 2 ON
BROWN/WHITE-DPS INPUT- DRY N.O. DIP SW 2 ON

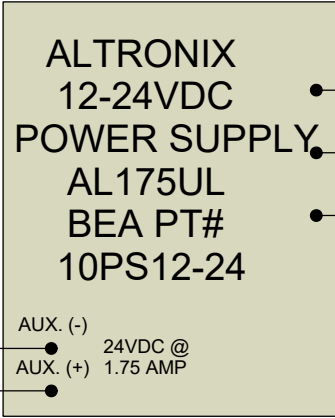


INPUT 115VAC/60Hz
.6 AMP

BLACK
WHITE
GREEN

AUX. (-) 24VDC @
AUX. (+) 1.75 AMP

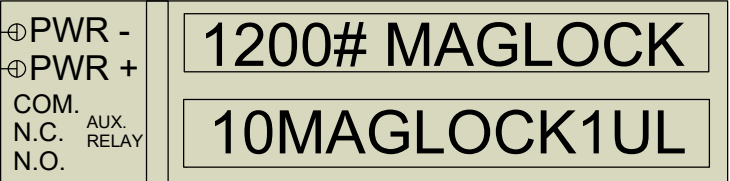

⊕ PWR -
⊕ PWR +
COM.
N.C.
AUX. RELAY
N.O.



BEA PT#
10SWITCH75

100 ENTERPRISE DRIVE
PITTSBURGH, PA 15275
PHONE: (412) 249-4100
FAX: (412) 249-4101
EMAIL: www.beasensors.com

**TITLE: ACCESS CONTROL
PACKAGE 1 (10ACP12)**

SIZE: A	DRAWN BY: WJR	REV BY: WJR	PART NO: 80.0411.01
SCALE: NONE	DATE: 07/18/2019	SHEET 1 OF 1	

NOTES: 1) SEE BR3-X USER'S GUIDE PAGE 7 FOR WIRING AND PROGRAMMING FUNCTION 36. RELAY 2 CAN BE USED TO ACTIVATE AN AUTOMATIC DOOR IF NEEDED.
2) SEE R2E-100 USER'S GUIDE FOR MORE INFORMATION.

IF AFTER TROUBLESHOOTING A PROBLEM, A SATISFACTORY SOLUTION CANNOT BE ACHIEVED, PLEASE CALL B.E.A., INC. FOR FURTHER ASSISTANCE DURING EASTERN STANDARD TIME AT 1-800-523-2462 FROM 8AM - 5PM. FOR AFTER-HOURS, CALL EAST COAST: 1-866-836-1863 OR 1-800-407-4545 / MID-WEST: 1-888-308-8843 / WEST COAST: 1-888-419-2564. DO NOT LEAVE ANY PROBLEM UNRESOLVED. IF YOU MUST WAIT FOR THE FOLLOWING WORKDAY TO CALL B.E.A., LEAVE THE DOOR INOPERABLE UNTIL SATISFACTORY REPAIRS CAN BE MADE. NEVER SACRIFICE THE SAFE OPERATION OF THE AUTOMATIC DOOR OR GATE FOR AN INCOMPLETE SOLUTION.WEB: WWW.BEASENSORS.COM