




▷ **LZR®-WIDESCAN**  
Motion, presence and safety sensor  
with virtual pull-cord functionality.




**Hygienic Solution**

Virtual pull-cord offers hands-free activation, reducing touchpoints




**Adjustable Settings**

Differentiate between pedestrian & vehicle traffic with a set minimum presence time



**Multiple Pull-Cords**


Program up to three pull-cords & modify as needed



**Additional Activation**

Motion, presence & safety detection fields add functionality for opening


▽ **HANDS-FREE ACTIVATION**

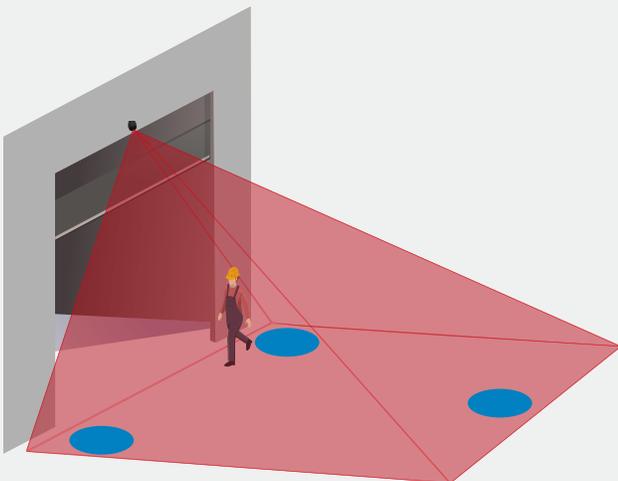


Virtual pull-cords offer hands-free activation without needing to add push buttons or other activation switches. By programming multiple virtual pull-cords, you can have designated activation spots for pedestrians and vehicles.

- Eliminate Ceiling Clutter
- Reduce Touchpoints
- Encourage Traffic Patterns

## ▽ COMMON APPLICATIONS

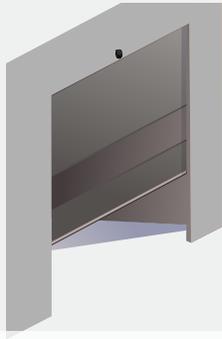

### Traffic Control

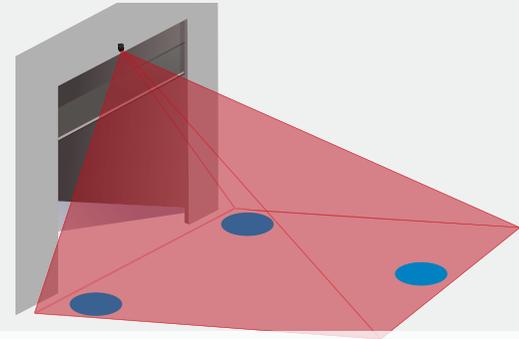

### Connecting Sensors

#### PULSE-ON-STOP ACTIVATION

In fast-paced environments, oncoming traffic can pose risks for both sides of the door. Encourage forklift traffic to slow down and come to a complete stop before activating the door.

Related Products:

- LZR-WIDESCAN

#### SEQUENCING MODE

Add logic when installing LZR-WIDESCAN on both sides of the door. The logic module provides sequencing between the two sensors and door state.

Related Products:

- LZR-WIDESCAN (2 qty)
- BR3-X (Function 11)

## ▽ TECHNICAL SPECIFICATIONS

<b>Technology</b>	LASER scanner, Time-of-Flight measurement (7 LASER curtains)
<b>Detection Mode</b>	Motion, presence, height, and speed
<b>Max. Detection Field</b>	
Width / Depth	1 x mounting height (adjustable depending on user settings)
<b>Thickness of First Curtain</b>	¼"
<b>Typ. Mounting Height</b>	6'6" – 30'
<b>Typ. Minimum Object Size</b>	6" @ 19'6" (in proportion to object distance)
<b>Test Body Dimensions</b>	27 ½" x 11 ¾" x 7 ¾"
<b>Min. Reflectivity Factor</b>	> 2% (of floor and object) (measured at max. 19'6" in safety field)
<b>Emission Characteristics</b>	
IR LASER	Wavelength 905 nm; output power 0.10 mW (CLASS 1)
Visible LASER	Wavelength 635 nm; output power 0.95 mW (CLASS 2)
<b>Supply Voltage</b>	12 – 24 VAC -10/+20% 12 – 30 VDC ±10% @ sensor terminal
<b>Power Consumption</b>	
Heating: Off	< 2.5 W
Heating: Eco or Auto	< 10 W, max 15 W
<b>Response Time</b>	Typ. 230 ms; max. 800 ms (depending on immunity settings)

<b>Output</b>	2 solid-state relays (galvanic isolation, polarity free) 24 VAC / 30 VDC (max. switching voltage) – 100 mA (max. switching current) - in switching mode: NO / NC - in frequency mode: pulsed signal (f= 100 Hz ±10%)  1 electro-mechanic relay (galvanic isolation, polarity free) 42 VAC / VDC (max. switching voltage) – 500 mA (max. switching current)
<b>Input</b>	30 VDC (max. switching voltage) low < 1 V      high > 10 V (voltage threshold)
<b>LED-Signal</b>	2 tri-colored LEDs: Output status / Remote Control Response / Error Signals 1 Blue LED: Bluetooth status
<b>Dimensions</b>	7 ¾" (H) x 6" (W) x 4" (D) (approx.)
<b>Material / Color</b>	PC / ASA / Black
<b>Rotation Angles on Bracket</b>	45° to the right, 15° to the left (lockable)
<b>Tilt Angles on Bracket</b>	-10 – 5°
<b>Degree of Protection</b>	IP65
<b>Temperature Range</b>	-22 – 140 °F
<b>Norm Conformity</b>	IEC 61000-6-2, IEC 61000-6-3, IEC 60950-1, IEC 60825-1, ISO 13849-1 PL "d"/ CAT2, IEC 62061 SIL 2, IEC 61496-1 ESPE Type 2



Watch our Warehouse Video



Product Questions?

Call BEA's Service Team:

1.800.523.2462