



FOCUS FAMILY

FOCUSED ACTIVE INFRARED
PRESENCE SENSORS



LEARN MORE



click or scan

TECHNOLOGY




DESCRIPTION

BEA's **FOCUS FAMILY** are focused, active-infrared-based presence sensors designed to effectively detect people and objects.

These compact sensors can be used in a variety of applications where space may be limited or additional detection is required to complement pre-installed sensors, such as on revolving doors where pinch-zone protection is needed.

The **FOCUS 2** offers the same protection as the **FOCUS** but can be recess mounted.

The **FOCUS** and **FOCUS 2** can be used on revolving doors, drive-thru windows, and in industrial applications such as gate and access control.

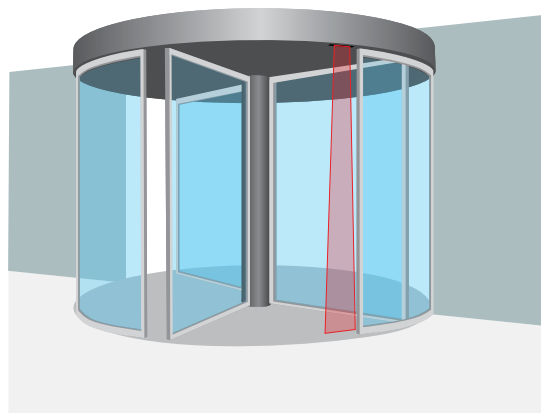


Low-Profile Detection

Low profile, recessed-mount enables FOCUS 2 to protect pedestrians from contact with the moving door

Perfect For Activation Of Small Windows / Pass-Thru


Ideal for drive-thru / pass-thru applications

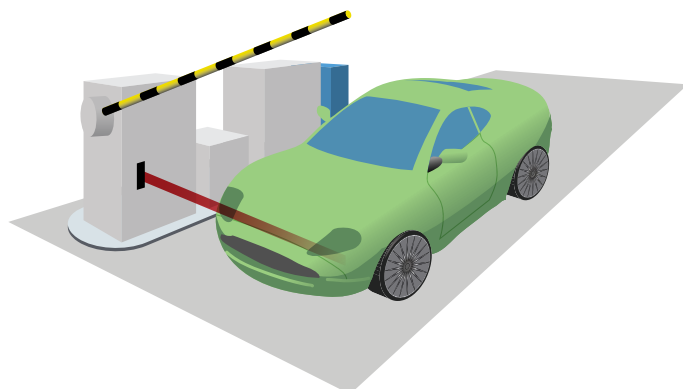


Ideal For Gate And Barriers

Horizontal mount for use in gate and barrier applications


APPLICATIONS



Gates & Barriers



Revolving Doors



Drive-Thru / Pass-Thru


TECHNICAL SPECIFICATIONS

Technology	Focused Active Infrared
Detection Mode	Presence
Power Supply	24 VAC / VDC \pm 10%
Current Consumption	60 mA (On); 30 mA (Off)
Output Interface; Relay	Relay; max. contact rating is 1 A @ 30 V (resistive)
Detection Range	0 – 8 1/5'
Distance Adjustment	2 – 8', rotating cam with linear adjustment
Detection Time	< 50ms
Detection Signal Duration	Infinite Presence Detection
LED Indicator Green	No Detection
Operating Temperature Range	-30 – 140 °F
Connection to controller	5-conductor cable
Relay Output	NO or NC

PRODUCT SERIES




10FOCUS
Surface mount, Presence sensor



10FOCUS2
Recessed, Presence sensor

RELATED PRODUCTS



1024VAC
24 VAC transformer with mounting feet

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM



BEA AMERICAS / RIDC Park West / 100 Enterprise Drive / Pittsburgh, PA
 T 1-800-523-2462 / F 1-888-523-2462 / E info-us@BEAsensors.com

A Halma company