




# SLIDING DOOR SOLUTIONS COMPARISON

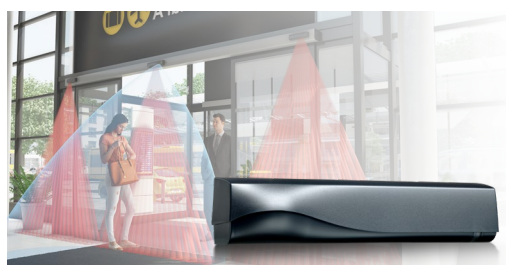

## IXIO

Motion and presence sensor for automatic sliding doors

## ULTIMO™

Automatic sliding door sensor with extended / enhanced safety

### PRIMARY APPLICATIONS

Standard Size Sliding Doors,  
Industrial Doors

Large or Standard Size Sliding Doors,  
Industrial Doors

### TECHNICAL SPECIFICATIONS

<b>Technology</b>	Microwave Doppler Radar & Active Infrared*	Microwave Doppler Radar & Active Infrared
<b>Mounting Height</b>	6 ½ – 11 ½'	6 ⅜ – 11 ⅜'
<b>Pattern Width</b>	1:1.1	1:1.4
<b>Infrared Field</b>		
Max. Number of Curtains	2	3
Max. Number of Spots	24 per curtain	32 per curtain (adjustable)
<b>Supply Voltage</b>	12 – 24 VAC ±10%; 12 – 30 VDC ±10%	12 – 24 VAC ±10%; 12 – 30 VDC ±10%
<b>Temperature</b>	-13 – 131 °F	-13 – 131 °F
<b>Dimensions</b>	10 ⅜" (W) × 2 ¼" (H) × 2 ¼" (D)	10 ¾" (W) × 2 ⅝" (H) × 2 ⅝" (D)
<b>Standards Compliant</b>	✓	✓ Exceeds
<b>Degree of Protection</b>	IP54	IP54
<b>Supply Voltage</b>	12 – 24 VAC ±10%; 12 – 30 VDC ±10%	12 – 24 VAC ±10%; 12 – 30 VDC ±10%

### FEATURES

<b>Threshold Protection</b>	—	✓
<b>Infrared Synchronization</b>	—	✓
<b>Installation Adjustments</b>	Mechanical and Digital (LCD Menu)	Mechanical and Digital (LCD Menu)
<b>Visible Alignment Spots</b>	4	8
<b>On-board Diagnostics</b>	✓	✓
<b>External Monitoring</b>	Active-Low	Active-High or Active-Low

\*IXIO-DT1, IXIO-DT1 INDUSTRIAL, and IXIO-DTIV feature both microwave doppler radar and active infrared. IXIO-ST and IXIO-ST INDUSTRIAL feature only active infrared.