



LPR36

FULL-LENGTH, 36 INCH HIGH-LOW ACTUATOR



DESCRIPTION

BEA's **LPR36** is a 36 inch actuator that exceeds all local ADA building codes requiring high and low actuators, eliminating the need to install two separate devices.

This stainless steel plate utilizes four highly-sensitive membrane switches that require very little force and ensure actuation across the entire surface. This functionality enhances accessibility for those with limited mobility or disabilities.

Available in wireless and hard wire versions, the **LPR36** can be conveniently mounted in a variety of locations.


TECHNICAL SPECIFICATIONS

Contact Configurations	SPST N.O.
Switching Voltage	0.1 – 50 VDC
Switching Capacity	1 Watt
Switching Current	0.005 – 100 mA DC
Operation Temperature	-32 – 212 °F (-35 – 100 °C)
Material	
Base	6063 Aluminum
Face Plate	304 Stainless Steel
Switch Actuator	Nylon 66
End Cap	UL94 ABS
Hardware	Stainless Steel
Compliance	California Building Code 2013, Page 559, 11B-404.2.9, Exception 2c


*NOT RECOMMENDED FOR USE IN AN ENVIRONMENT WHERE IT WILL BE DIRECTLY EXPOSED TO WATER. FOR EXAMPLE, OUTDOOR, NOT PROTECTED FROM DIRECT RAIN.

**Wireless conversion kit for transmitter replacement or conversion from hardwired to wireless

APPLICATIONS



Sliding Doors




Swinging Doors



Revolving Doors

DIMENSIONS

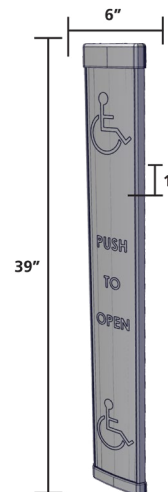

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.