



LPR36

FULL-LENGTH, 36 INCH, HIGH-LOW ACTUATOR


DESCRIPTION

BEA's **LPR36** is an actuator that exceeds ADA requirements, local and national building codes and standards. This 36-inch actuator provides a high/low actuator and eliminates the need to install two separate devices.

The stainless steel plate utilizes four highly sensitive membrane switches, ensuring actuation across the entire surface. This functionality enhances accessibility for those with limited mobility or disabilities.

Available in wireless and hardwire versions, the **LPR36** can be conveniently mounted in a variety of locations.

APPLICATIONS



Sliding Doors



Swinging Doors



Revolving Doors

Not recommended for use in an environment where it will be directly exposed to water (e.g. outdoor, not protected from direct rain).



TECHNICAL SPECIFICATIONS

TECHNOLOGY / PERFORMANCE

Contact Configurations SPST N.O.

ELECTRICAL

Switching Voltage < 50 VDC

Switching Capacity 1 Watt

Switching Current < 100 mA DC

PHYSICAL

Material


Base	6063 aluminum
Face Plate	304 stainless steel
Switch Actuator	nylon 66
End Cap	UL94 ABS
Hardware	stainless steel

Operating temperature: -32 – 212 °F (-35 – 100 °C)

COMPLIANCE

Compliance California Building Code 2022, 11B-404.2.9, Exception C
ANSI 156.10, 156.19, 156.27, 156.38

DIMENSIONS

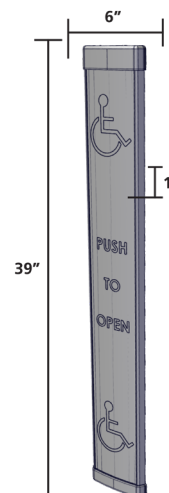

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM



BEA AMERICAS / RIDC Park West / 100 Enterprise Drive / Pittsburgh, PA
T 1-800-523-2462 / F 1-888-523-2462 / E info-us@BEAsensors.com

A Halma company