



LZR®-WIDESCAN

MOTION, PRESENCE & SAFETY SENSOR
FOR INDUSTRIAL DOORS



LEARN MORE



click or scan

TECHNOLOGY




DESCRIPTION

BEA's **LZR®-WIDESCAN** is a LASER-based, Time-of-Flight sensor used for motion, safety and presence detection in a variety of industrial door applications. This highly configurable solution offers the benefits of activation and safety, while reducing installation time.

This IP65 rated sensor creates a volumetric detection area by generating seven angled LASER curtains. It has the ability to detect objects based on direction, speed, object size and height.

The **LZR®-WIDESCAN** detection field operates independent of ground conditions, allowing for superior functionality in harsh environments.

Easily configure sensor settings with the **LZR®-WIDESCAN** mobile app. The mobile app provides a complete view of sensor settings, from field configurations to immunity.

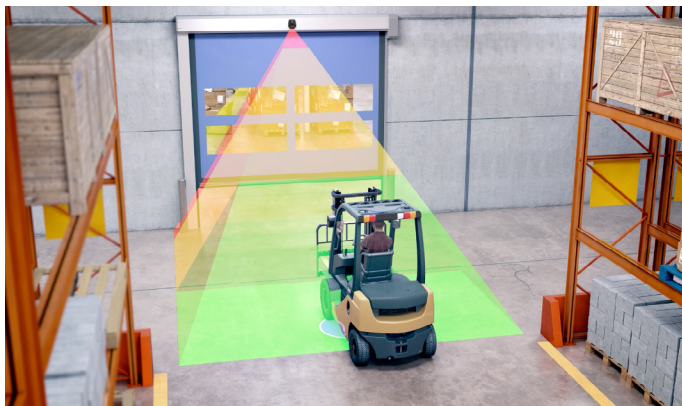

Easy Setup

Utilize mobile app to easily configure sensor settings (available on the Apple App Store & Google Play Store)

Energy Efficient

Promotes energy savings by reducing false detections / unnecessary door cycling, helping to regulate HVAC

Virtual Pull Cord

Virtual pull-cord function can differentiate between pedestrian and vehicle traffic and can provide pulse-on-stop activation

Alternative Solution

Ideal for replacing costly / labor-intensive induction loop and pull-cord solutions

Visible Spots

Two visible LASER alignment spots ensure accurate pattern placement

TECHNICAL SPECIFICATIONS

TECHNOLOGY / PERFORMANCE

Technology	LASER scanner, time-of-flight measurement (7 laser curtains)
Detection mode	motion, presence, height, and speed
Max. detection field	width: 1.2 × mounting height depth: 1.2 × mounting height adjustable, depending on user settings
Thickness of first curtain	¼"
Typ. mounting height	6'6" – 32'
Min. reflectivity factor	> 2 % (of floor and object) (measured at max. 19'6" in safety field)
Typ. min. object size	6" at 19'6" (in proportion to object distance)
Testbody	27 ½" × 11 ¾" × 7 ¾"

ELECTRICAL

Emission characteristics	
IR laser:	wavelength 905 nm; output power 0.10mW (CLASS 1)
Red visible laser:	wavelength 635 nm; output power 0.95mW (CLASS 2)
Supply voltage	12 – 24 VAC -10/+20% 12 – 30 VDC ±10% at sensor terminal
Power consumption	< 2.5 W (heating = OFF) < 10 W, max 15 W (heating = ECO or AUTO)
Response time	typ. 230 ms max. 800 ms (depending on immunity settings)
Output	2 solid-state relays (galvanic isolation, polarity free) 24 VAC / 30 VDC (max. switching voltage) 100 mA (max. switching current) - in switching mode: NO/NC - in frequency mode: pulsed signal (f= 100 Hz ±10%) 1 electro-mechanic relay (galvanic isolation, polarity free) 42 VAC/VDC (max. switching voltage) 500 mA (max. switching current)
Input	30 VDC (max. switching voltage) low < 1 V high > 10 V (voltage threshold)
Bluetooth communication	operating bandwidth: 2402 - 2480 MHz max. transmitted power: 12 dBm


PHYSICAL

Dimensions	7 ¾" (H) x 6" (W) x 4" (D) (approx.)
Material / Color	PC, ASA / Black
Protection degree	NEMA 4 / IP65
Temperature range	-22 – 140 °F
Rotation angles on bracket	45° to the right 15° to the left (both directions lockable)
Tilt angles on bracket	-10 – 5°
LED signals	2 tri-colored LED: output status / remote control response / error signals 1 blue LED: Bluetooth status


COMPLIANCE

Compliance	EN 300 328 V2.2.2, EN 301 489-1 V2.2.2, EN 301 489-17 V3.2.0, EN 60825-1:2014, EN 62311:2008
-------------------	--


APPLICATIONS




Dynamic Ground Conditions



Pedestrian Safety



Directionality



Full Open / Partial Open

PRODUCT SERIES

 <p>10LZRWIDESCAN Motion, presence & safety sensor</p>	 <p>10INDBRACKET Industrial mounting bracket</p>	 <p>10MINIBRACKET Short adjustable mounting bracket</p>
 <p>10.1311 LZR-WIDESCAN adapter kit</p>	 <p>10WBA Universal mounting bracket arm</p>	 <p>10WBAMOUNT Universal mounting bracket plate</p>
 <p>35.1554 30' Cable</p>	 <p>35.1555 50' Cable</p>	 <p>10PSMDR2024 100 – 240 VAC, 24 VDC power supply</p>
 <p>41.8838 LZR-WIDESCAN replacement base</p>	 <p>35.0245 LZR-WIDESCAN replacement cover</p>	

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

WWW.BEASENSORS.COM



BEA AMERICAS / RIDC Park West / 100 Enterprise Drive / Pittsburgh, PA
T 1-800-523-2462 / F 1-888-523-2462 / E info-us@BEAsensors.com

A Halma company