



## BEA ARCHITECTURAL SPECIFICATION SHEET

### All Automatic Doors: Push Plate – LPR36 Vertical Actuator Bar (Wired)

#### Product Specifications

Vertical actuation bar shall be a UL listed assembly that utilizes 4 redundant membrane switches and provides 216 square inches of activation area. 6 x 36 in. (91.44 cm) Push Plate for sliding, swinging, folding and revolving doors.

Device shall not require a force to activate that is greater than 2 pounds of pressure and shall not have horizontal movement greater than 3/16 in. (.47 cm) along the vertical plane. Device shall be capable of being actuated from any angle along the horizontal plane.


1. 6 in. (15.24 cm) wide by 36 in. (91.44 cm) high and shall not project more than 1 1/8 in. (2.54 cm) off the face of the mounting surface.
2. Faceplate shall be constructed of 304-grade stainless steel and covered with a clear, fingerprint resistant powder coat.
3. Back-plate shall be constructed of 1/8" thick extruded aluminum
4. Thermal Range Requirements: Provide touch-activation device that can be used in all climates, allow for thermal range from - 32°F (-35°C) to 212°F (100°C).
5. Low Profile: Vertical Actuation Bar shall have flat face to allow activation of the entire assembly width. Vertical edges to be tapered with friction-fit to be weather resistant and prevent impact from objects and vandalism.
6. Power Membrane Switch is capable of: Low voltage membrane switch: 100 milliamps, 50 volts DC watt power.

Model 10LPR36-HW – Hardwired only, marked with two (2) Handicapped Logos and PUSH TO OPEN

Model 10LPR36L-HW – Hardwired, (2) large handicapped only



### Product image and Application Photo

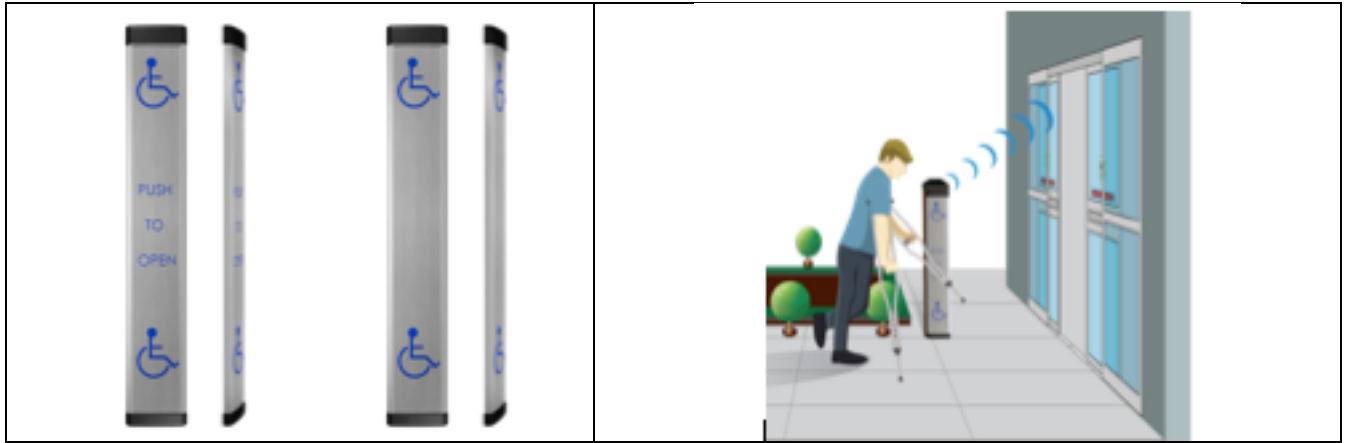

**BEA Inc.**  
RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213

Phone: 1.800.52v3.2462  
Fax: 1.888.523.2462



**AAADM** Member  
American Association of  
Automatic Door Manufacturers

A HALMA COMPANY



### Technical Specs:

Switch Traces	FR4 Gold Plated
Membrane Switches	3M 7993MP
Base Plate	Aluminum

Faceplate	Stainless Steel
Switch Actuator	Nylon 6/6
End Cap	UL94 ABS

<b>Contact Configuration</b>	SPST N.O.
<b>Switching Voltage</b>	.1 to 50 VDC
<b>Switching Capacity</b>	1 Watt
<b>Switching Current</b>	.005 to 100 mA DC
<b>Contact Bounce</b>	< .3 ms make; < .6 ms break
<b>Trip Force</b>	1.5 lbs
<b>Two Conductor Cabling</b>	24 awg 7 x 32 stranding UL 1007
<b>Operation Temperature</b>	-32° F to 212° F -35° C to 100° C
<b>Contact Life</b>	2 million cycles


BEA Inc.  
 RIDC Park West  
 100 Enterprise Drive  
 Pittsburgh, PA 15275-1213

Phone: 1.800.52v3.2462  
 Fax: 1.888.523.2462





**Dimensions:**

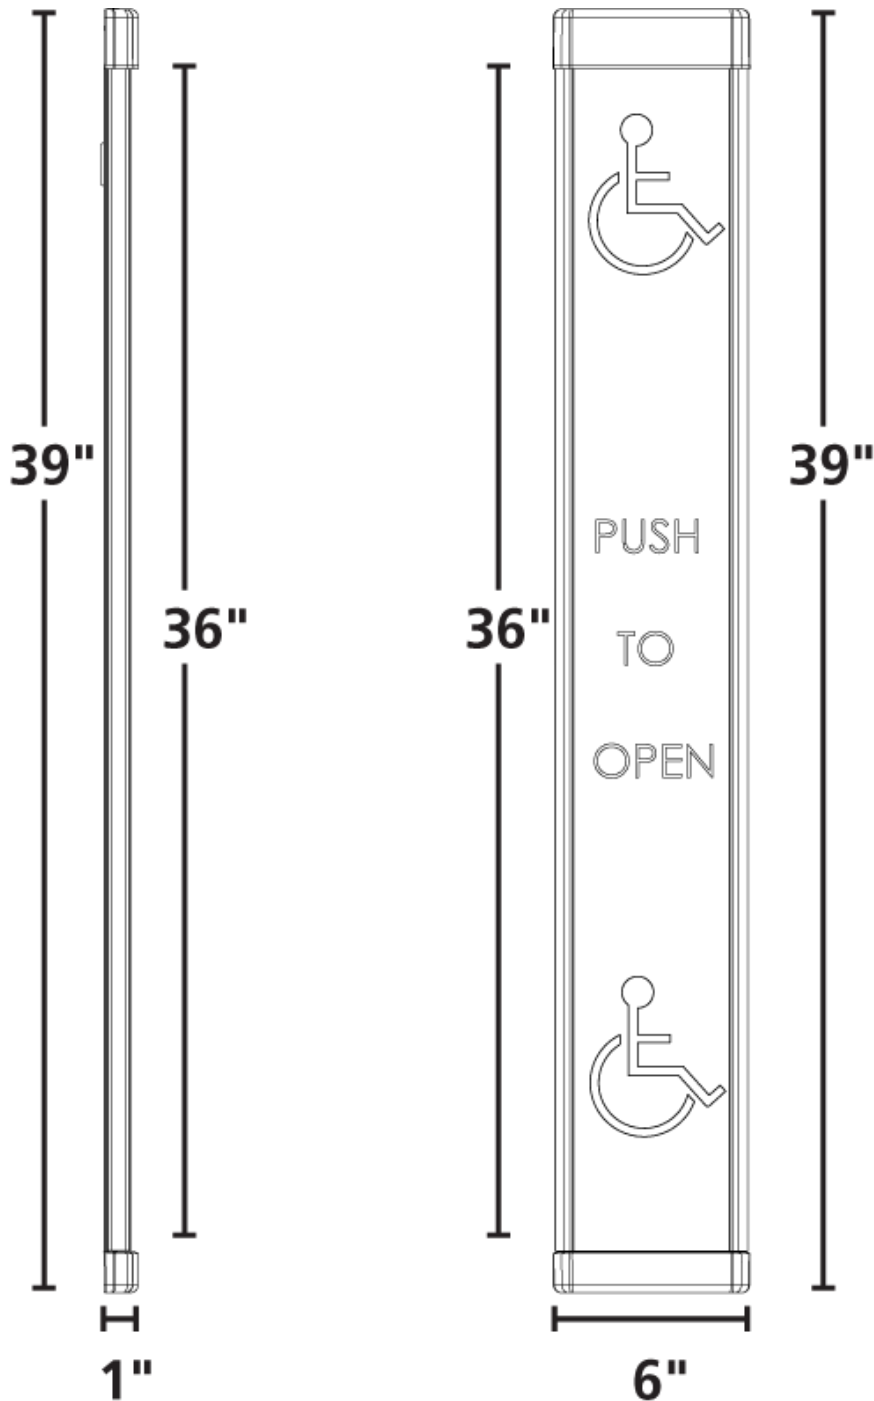

**BEA Inc.**  
RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213

Phone: 1.800.523.2462  
Fax: 1.888.523.2462



**AAADM** Member  
American Association of  
Automatic Door Manufacturers

A HALMA COMPANY



## BEA ARCHITECTURAL SPECIFICATION SHEET

### Automatic Door Solutions: Push Plate – LPR36 Vertical Actuator Bar (Wireless)

#### Product Specifications

Vertical actuation bar shall be a UL listed assembly that utilizes 4 redundant membrane switches and provide greater than 200 square inches of activation area. Push Plate for sliding, swinging, folding and revolving doors.

Device shall not require a force to activate that is greater than 2 pounds of pressure, and shall not have horizontal movement greater than 3/16 in. (.47 cm) along the vertical plane.

1. 6 in. (15.24 cm) wide by 36 in. (91.44 cm) high activation area. Capable of being activated from any angle
2. Faceplate shall be constructed of 304-grade stainless steel and covered with a clear, fingerprint resistant powder coat.
3. Back-plate shall be constructed of 1/8" (.31 cm) thick extruded aluminum
4. 900MHz or 433MHz transmitter to be pre-wired at the factory and housed within an ABS end cap.
5. Thermal Range Requirements: Provide touch-activation device that can be used in all climates, allow for thermal range from - 32°F (-35°C) to 212°F (100°C).
6. Vertical Actuation Bar shall have flat face to allow activation of the entire assembly width. Vertical edges to be tapered with friction-fit to be weather resistant and prevent impact from objects and vandalism.
7. Low voltage membrane switch: 100 milliamps, .1 to 50 VDC, 1 Watt

Model 10LPR36-433 – Hardwired only, marked with two (2) Handicapped Logos and PUSH TO OPEN

Model 10LPR36L-433 – Hardwired, (2) large handicapped only

Model 10LPR36-900 – Hardwired only, marked with two (2) Handicapped Logos and PUSH TO OPEN

Model 10LPR36L-900 – Hardwired, (2) large handicapped only

**Note To Specifier:** Product to be specified with one (1) 433 or 900 MHz receiver per door operator. Product included factory installed wireless transmitter of desired frequency.

BEA Inc.  
RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213


Phone: 1.800.52v3.2462  
Fax: 1.888.523.2462



Member  
American Association of  
Automatic Door Manufacturers

A HALMA COMPANY

## Product image and Application Photo

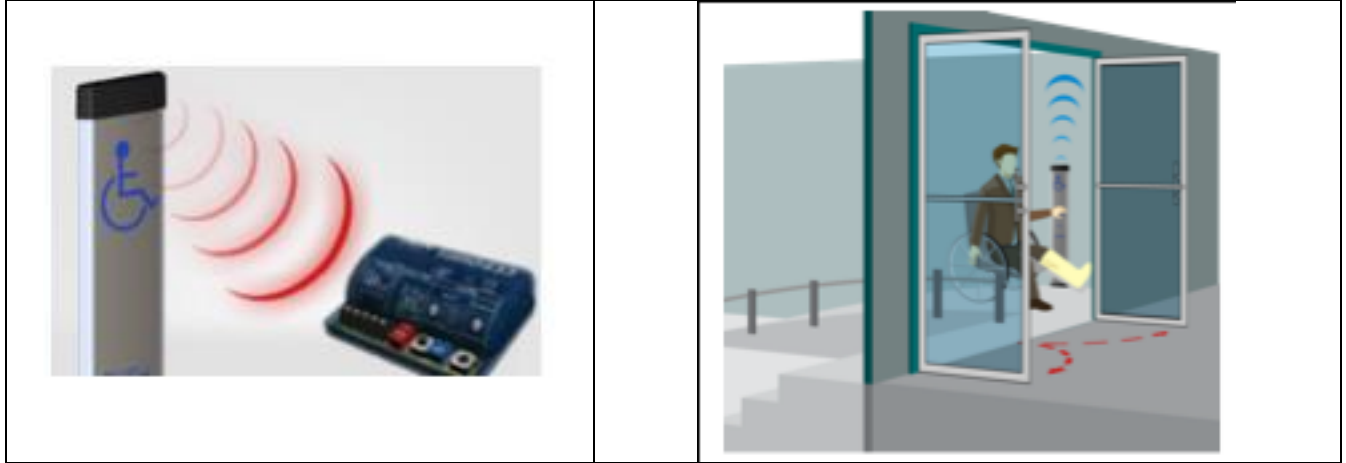

### Technical Specs:

Switch Traces	FR4 Gold Plated
Membrane Switches	3M 7993MP
Base Plate	Aluminum

Faceplate	Stainless Steel
Switch Actuator	Nylon 6/6
End Cap	UL94 ABS

### Technical Specs: Hard wired

Contact Configuration	SPST N.O.
Switching Voltage	.1 to 50 VDC
Switching Capacity	1 Watt
Switching Current	.005 to 100 mA DC
Contact Bounce	< .3 ms make; < .6 ms break

Trip Force	1.5 lbs
Two Conductor Cabling	24 awg 7 x 32 stranding UL 1007
Operation Temperature	-32° F to 212° F -35° C to 100° C
Contact Life	2 million cycles
Transmitter Frequency	300, 433 or 900 MHz

**BEA Inc.**  
 RIDC Park West  
 100 Enterprise Drive  
 Pittsburgh, PA 15275-1213

Phone: 1.800.52v3.2462  
 Fax: 1.888.523.2462



Member  
**AAADM** American Association of  
 Automatic Door Manufacturers

A HALMA COMPANY



### 900 MHz Tech Specs

900 MHz Wireless Receiver	
<b>Frequency Range</b>	908 – 918 MHz
<b>Channels</b>	3 channels, frequency hopping
<b>Digital Modulation</b>	Frequency Shift Key
<b>Data Rate</b>	Programmable
<b>Capacity</b>	Capable of 74 unique transmitters
<b>Signaling</b>	2 LEDs, learn and activation
<b>Sync Management</b>	1 LED, range finding signal strength smart LED
<b>Certifications</b>	FCC Part 15, IC
<b>RF Antenna</b>	1/2 wavelength external RF antenna
<b>Receiver Power</b>	12 - 24 V AC/DC
<b>Contact Relays</b>	1 relay
<b>Maximum Switch Power</b>	120 VAC @ 0.5 amp 60 VDC @ 0.3 amp
<b>Power Consumption</b>	40 mA 24 VDC @ 1 amp
<b>Dip Switches</b>	3 dip switches

900 MHz Wireless Transmitters	
<b>Frequency Range</b>	908 – 918 MHz
<b>Channels</b>	3 channels, frequency hopping
<b>Activation Buttons</b>	Hardwired: 1 Wireless: 1, 2, 3, or 4
<b>Range</b>	Hardwired: <i>Signal strength may vary per application. Contact technical services for more information.</i> Wireless: < 500 feet – Open Air
<b>Power</b>	Hardwired: 2 AAA batteries @ 3 VDC Wireless: 1 Lithium Ion coin battery @ 3 VDC
<b>Signaling</b>	1 LED, Transmit
<b>Battery Life</b>	300,000 activations
<b>Certifications</b>	FCC Part 15, IC
<b>Operating Temperature</b>	14°F (-10°C) to 131° F (55°C)
<b>Power Consumption</b>	30 mA
<b>Emitted Radio Power</b>	-25 dBm

BEA Inc.  
 RIDC Park West  
 100 Enterprise Drive  
 Pittsburgh, PA 15275-1213

Phone: 1.800.52v3.2462  
 Fax: 1.888.523.2462



Member  
 American Association of  
 Automatic Door Manufacturers

A HALMA COMPANY



<b>Behavior Settings</b>	Learn, Delay, Activation, Hold time
<b>Potentiometer</b>	0 to 30 second delay


**433 MHz Wireless Technical Specs:**

Frequency	433 MHz
Radio Control Type	Digital
Emitted Radio Power	-28.7 dBm (transmitter)
Power Consumption	3 mA (transmitter); 30 mA (receiver)
Input Voltage	12 to 24 VAC / VDC
Contact Rating	1.0 A @ 30 VDC 0.5 A @ 125 VAC 0.3 A @ 60 VDC
Operating Temp Operating Temp (cont.)	14°F to 131°F -10°C to 55°C
Max. Transmitters per Receiver	100 transmitters
LED Functionality Blue Red	Relay Activity Receiver/Transmitter Learn
Dimensions (LxWxH) Receiver	2.75" x 2.125" x 1.0" (7.0 cm x 5.38 cm x 2.54 cm)
Transmitter	2.75" x 1.375" x 0.6" (7.0 cm x 3.49 cm x 1.52)
Certifications	CE, FCC, IC

**BEA Inc.**  
 RIDC Park West  
 100 Enterprise Drive  
 Pittsburgh, PA 15275-1213

Phone: 1.800.52v3.2462  
 Fax: 1.888.523.2462




**AADM** Member  
 American Association of  
 Automatic Door Manufacturers

A HALMA COMPANY





**Dimensions:**

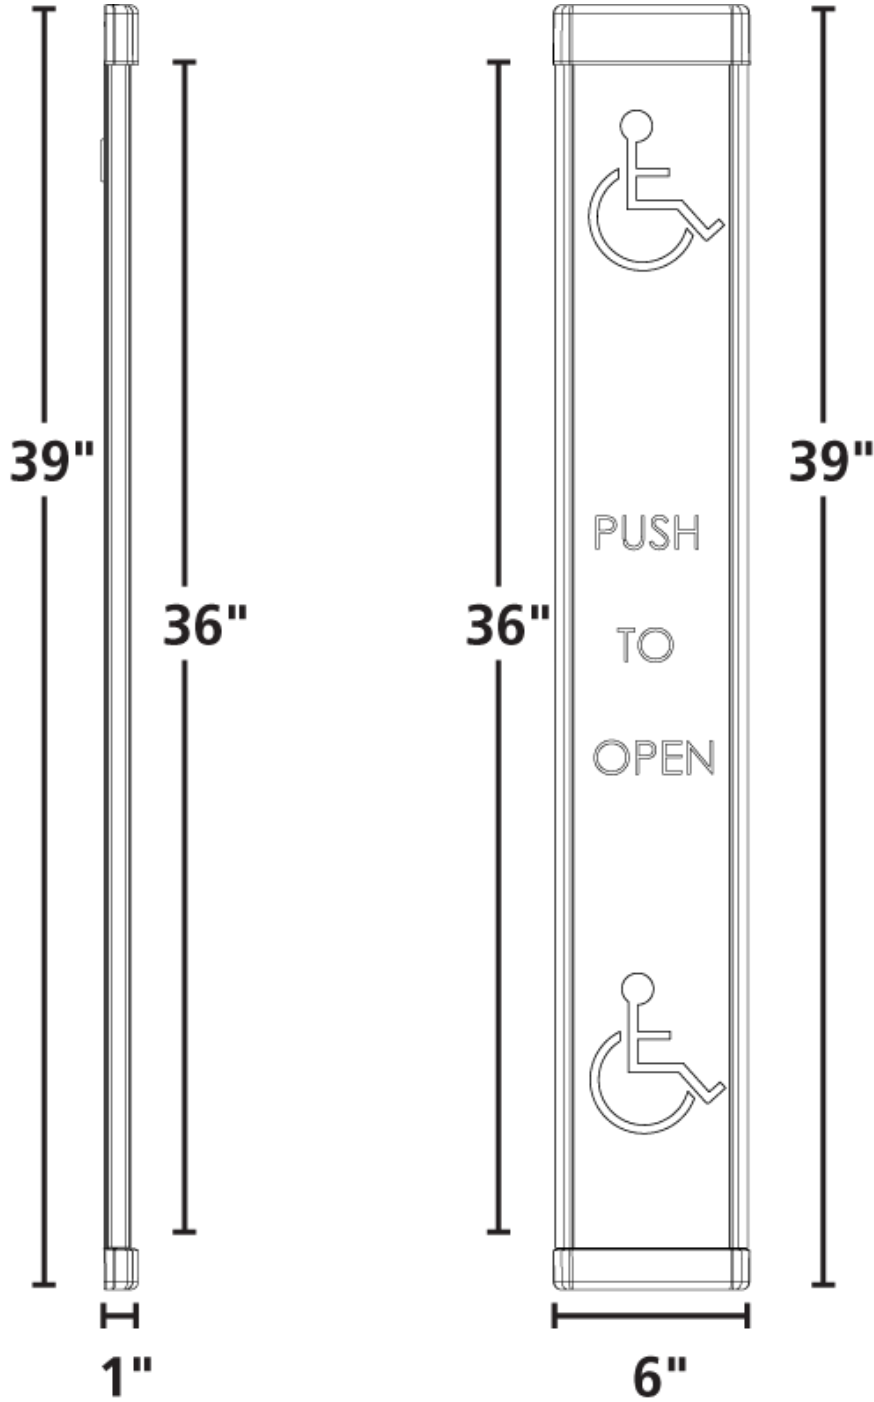

**BEA Inc.**  
RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213

Phone: 1.800.523.2462  
Fax: 1.888.523.2462



Member  
**AAADM** American Association of  
Automatic Door Manufacturers

A HALMA COMPANY