


300 MHZ FAMILY

300 MHZ WIRELESS TRANSMITTERS AND RECEIVER




APPLICATIONS

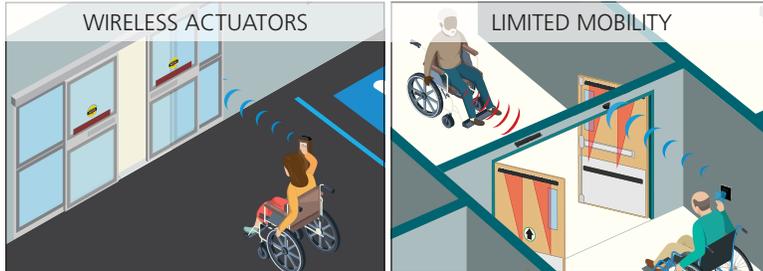

TECHNICAL SPECIFICATIONS

Frequency	300 MHz
Radio Control Type	Analog
Input Voltage	24 VAC / VDC
Operating Temperature	14 °F – 131 °F
Setup	10 dip switch access code programming
Power	Hardwired: 1 9-volt or 12-volt battery Wireless: 1 9-volt or 12-volt battery
Norm Conformance	CE, FCC, IC
Receiver Dimensions	
Without Flange	4.9 in (L) × 3.2 in (W) × 1.4 in (H)
With Flange	5.4 in (L) × 3.2 in (W) × 1.4 in (H)

DIMENSIONAL DRAWINGS

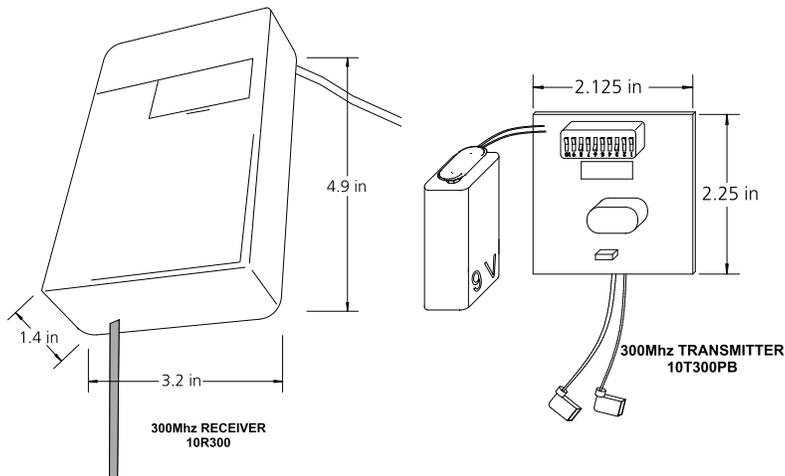

RELATED PRODUCTS



10R300
300 MHz
ANALOG RECEIVER



10T300HH
1-BUTTON HANDHELD
TRANSMITTER



10T300HHDBL
2-BUTTON HANDHELD
TRANSMITTER




10T300HH4
4-BUTTON HANDHELD
TRANSMITTER



10T300KEYCHAIN
1-BUTTON KEYCHAIN
TRANSMITTER



10T300MINIPB
1-BUTTON MINIATURE
WIRED TRANSMITTER



10T300PB
WIRED TRANSMITTER
NO CASE

www.BEAinc.com

© 2018 BEA, Inc. All rights reserved.

300 MHZ FAMILY 300 MHZ TRANSMITTERS AND RECEIVERS

BEA, Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462
Technical Support: 800.407.4545

