



BEA Architectural Specification Sheet Automatic and Industrial Door Solutions: Push Plate – 10PBS6X (Hardwired)

Product Specifications

Square Push Plate for sliding, swinging, folding and revolving doors as well as industrial doors including overhead, roll-up and high speed and gates. Wired push plate shall utilize a single pole dry contact switch capable of providing a normally open or normally closed contact for door activation.

1. Push plate provided with no exposed fasteners on the faceplate area.
2. Faceplate utilizes an abrasive etch lettering and/or logo.
3. Push plates made of plastic, or having surface applied painted or decal lettering shall not be acceptable.
4. Stainless steel square style push plate (PBS6) for wall mount applications. Is scratch / scuff resistant and will not deteriorate or rust.
5. Beveled edges provide a tamper and vandal resistant solution
6. All-activate plate activates with any "push" location.
7. Weather boot provided between plate and plate back.

Note to Specifier: Select one of the following model paragraphs and delete those not required.

8. Model 10PBS6 marked PUSH TO OPEN, 6 inches (15.24 cm) by 6 inches (15.24 cm) by 1.27 inch (3.22 cm).
9. Model 10PBS6LL Handicapped logo 6 inches (15.24 cm) by 6 inches (15.24 cm) by 1.27 inch (3.22 cm).
10. Model 10PBS61 Handicapped logo and marked PUSH TO OPEN, 6 inches (15.24 cm) by 6 inches (15.24 cm) by 1.27 inch (3.22 cm).
11. Model 10PBS610 no marking, 6 inches (15.24 cm) by 6 inches (15.24 cm) by 1.27 inch (3.22 cm).

Note To Specifier: Select one of the following mounting paragraphs and delete those not required.

12. Model 10BOX6SQSM – ABS surface mount box
13. Model 10BOX6SQFM – ABS flush mount.

BEA Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213


Phone: 1.800.523.2462
Fax: 1.888.523.2462



Member
American Association of
Automatic Door Manufacturers

A HALMA COMPANY

Product image and Application Photo

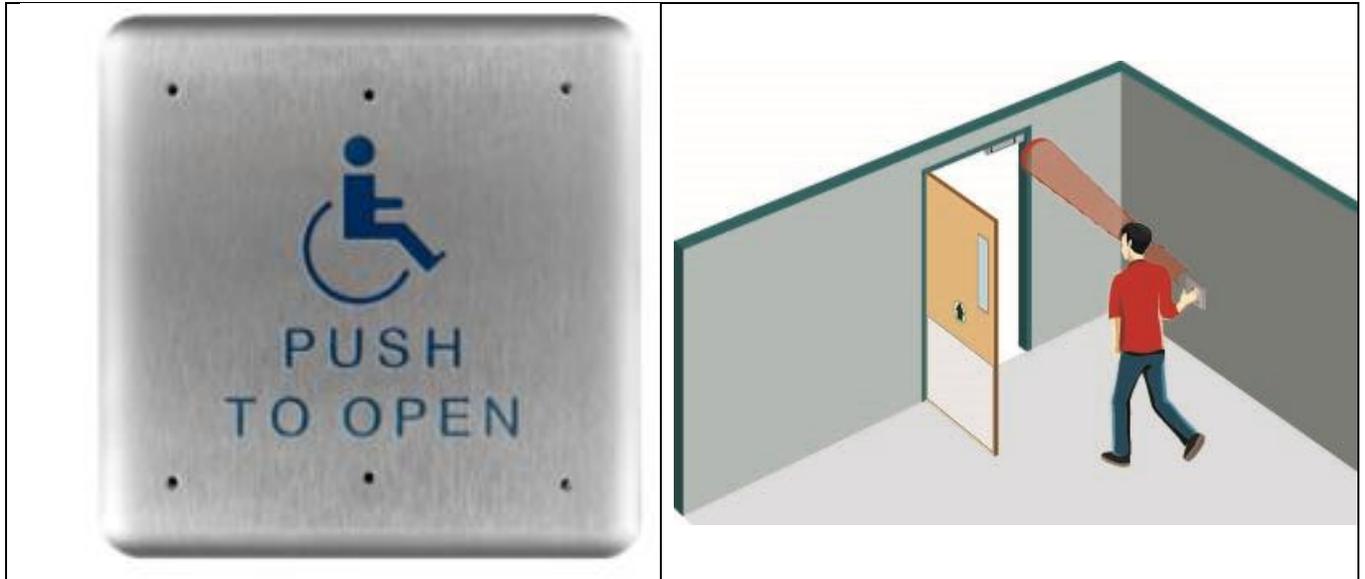

Technical Specs:

Faceplate Material	16 gauge, 304 2B Stainless Steel
Backplate Material	1/8 inch (.31 cm) thick, Aluminum
Mounting Screws	Stainless Steel, 6-32 x 1 in & 8-32 x 1 in Allen Head Size: 5/64
Cherry Switch	Single-pole, 15 A, COM/NO/NC Contacts

Dimensions:



BEA Inc.
 RIDC Park West
 100 Enterprise Drive
 Pittsburgh, PA 15275-1213

Phone: 1.800.523.2462
 Fax: 1.888.523.2462

79.0257.01 20151203



Member
 American Association of
AAADM Automatic Door Manufacturers

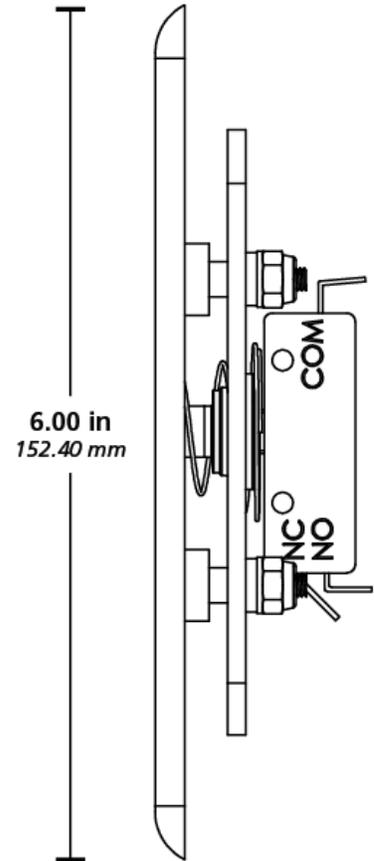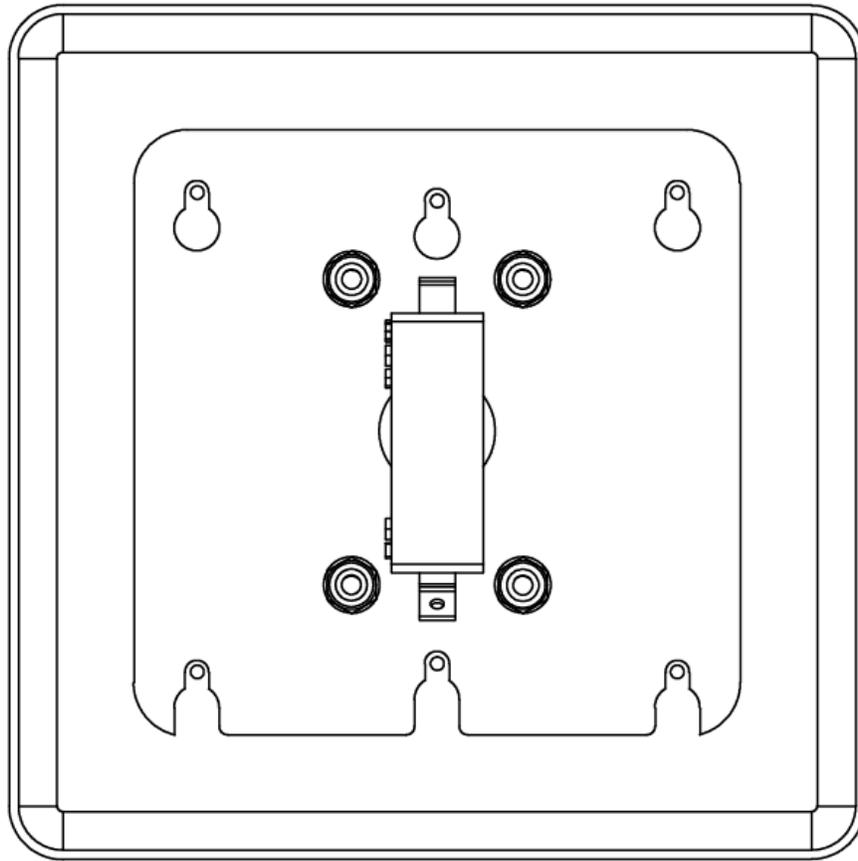

6.00 in
152.40 mm

6.00 in
152.40 mm

1.60 in
40.64 mm

BEA Inc.
RIDC Park West
100 Enterprise Drive
Pittsburgh, PA 15275-1213

Phone: 1.800.523.2462
Fax: 1.888.523.2462

79.0257.01 20151203



AAADM Member
American Association of
Automatic Door Manufacturers

A HALMA COMPANY